

PHASE | Anywave:

Multi-Stream Processors – Processadores Multi-stream



Multi-Stream Processor



Overview

The Anywave Multi-Stream Processor incorporates a Dynamic PSIP Generator and Inserter, has 4 HD/SD SDI inputs, converts and switches 4 CVBS inputs into 4 SDI outputs, supports 4 ASI inputs into onboard Multiplexor with 2 ASI outputs, and manages EAS control signals and switching. The module provides manual switching between 4 incoming SDI inputs and 4 converted SDI signals from CVBS sources, with automatic EAS switching of EAS signal, which overrides all manual settings when an EAS trigger occurs.

Key Features

- Static & Dynamic PSIP Generator & Inserter, with auto EPG ingestion (TMS, etc.)
- Provides 4 HD/SD SDI inputs, fully compliant with SDI standards
- Converts 4 CVBS inputs to SDI signals
- Manual switching between 4 incoming SDI inputs and 4 CVBS analog-to-digital converted SDI signals into 4 SDI Outputs
- Automatically switches 4 SDI Outputs to EAS signal when EAS trigger occurs, resumes back to original outputs when EAS trigger stops
- Provides EAS signal and EAS control signal loop-out
- 4 ASI Inputs into on-board Multiplexor, with program cherry picking into 2 ASI Outputs



Specifications

Inputs

- 4 CVBS Inputs: composite video (yellow) and stereo audio (white and red)
Connector: RCA
- 4 SDI inputs: SD-SDI / HD-SDI compatible
Connector: BNC female 75 Ω
- EAS IN: composite video (yellow) and stereo audio (white and red)
Connector: RCA
- EAS CTRL IN: EAS trigger, 6-pin slot
- 4 ASI inputs: Connector: BNC female 75 Ω

Signal Processing

- Converts 4 CVBS inputs to SDI signals
- Manually switches between 4 incoming SDI inputs and 4 converted SDI signals
- Automatically converts the EAS IN signals to SDI formats when EAS trigger occurs
- Outputs selected source or EAS signal via 4 SDI
- 4 ASI inputs into MUX with program cherry picking

Outputs


- 4 SDI outputs: source from 4 SDI inputs and 4 CVBS inputs, or EAS signal when EAS trigger last.
Connector: BNC female 75 Ω
- EAS OUT: loop-out of EAS IN, A/V signal
- EAS CTRL OUT: loop-out of EAS CTRL IN, 6-pin slot
- 2 ASI outputs from Mux: Connector: BNC female 75 Ω

Controls

- MCU ETH: Used for Graphic User interface
Connector: RJ-45, 10/100M base-T
- PSIP ETH: Used for PSIP source input and config
Connector: RJ-45, 10/100M base-T

Other

- Power Supply: 88 ~ 264 VAC, 50/60Hz
- Operating Temperature: 0° C ~ 50° C (+32°F~+122°F)
- Operating Humidity: \leq 95%
- Size: 1 RU, 19" Wide
- Weight: 10 LBS (net) / 15 LBS (gross)

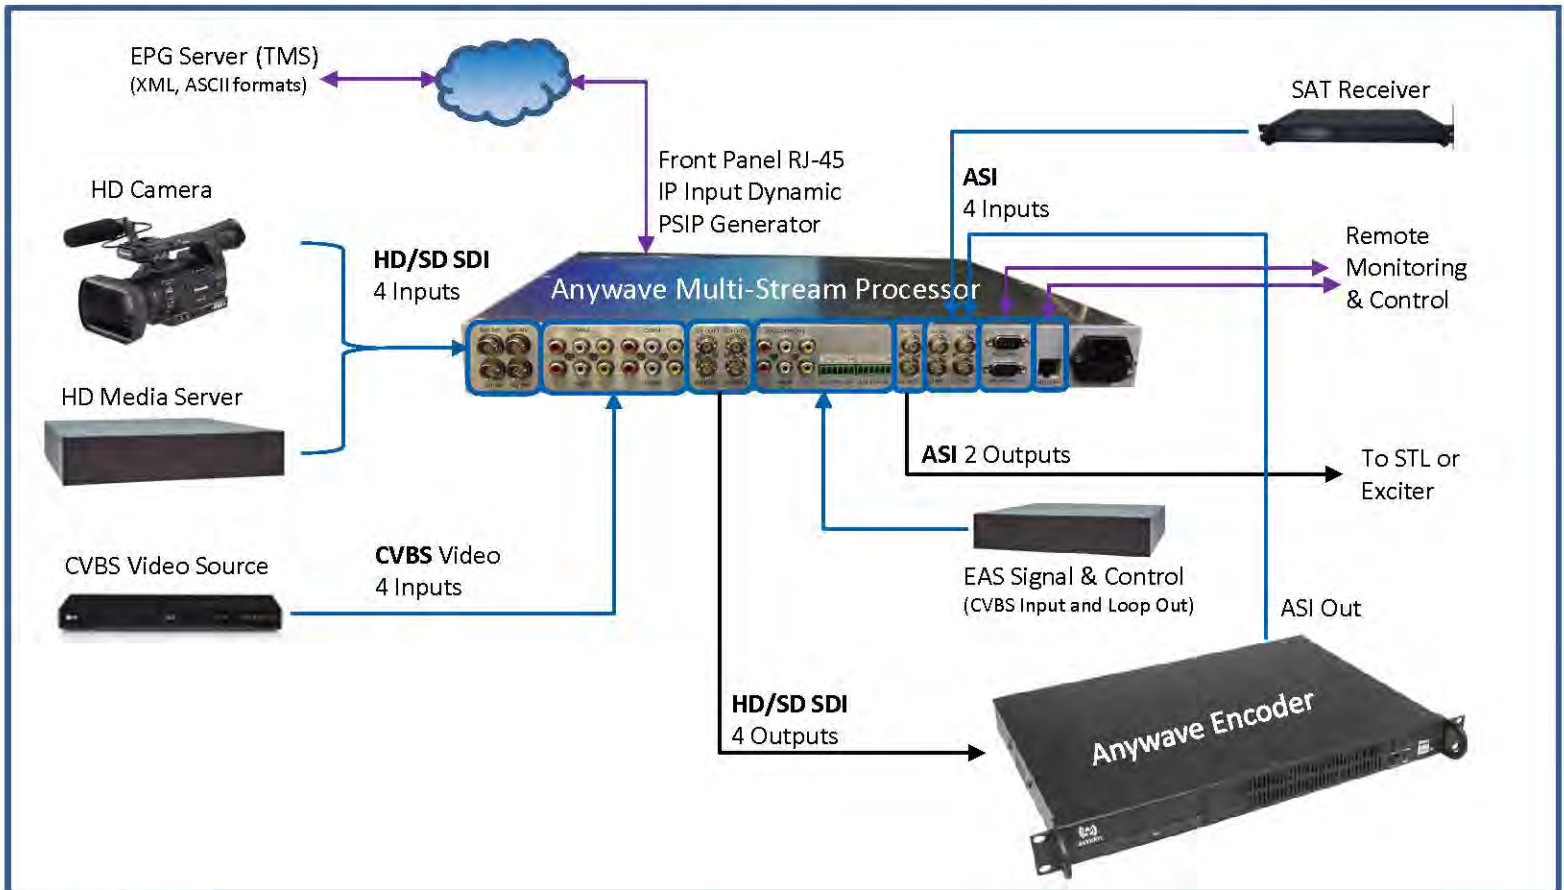

NOSSAS REPRESENTADAS:



Anywave Communication

Ikegami



VISLINK
News & Entertainment

**ANTON
BAUER**



Vinten

veset

TVlogic

Litepanels

interra
systems



SILVUS
TECHNOLOGIES

Value Your Content
thinklogical
Trust Our Proven Ingenuity

CueScript
A WAY WITH WORDS...

Video **Clarity**
Tools for Video Analysis

Telemetrics Inc.
Camera Control Systems



CRYSTAL

AJA
AJA VIDEO SYSTEMS INC

PHABRIX
broadcast excellence

AVP

NATCI

NVERZION





PHASE Engenharia Ind. e Com. Ltda.

Av. Olegário Maciel 231, Lojas 101 a 105
Barra da Tijuca | Rio de Janeiro, RJ | CEP 22 621 200
Tel +55.21.2493.0125

Av. Ibirapuera 2.907, Conj. B306 & 7 - Ed. Conv. Corp. Plaza – Torre C
Indianópolis | São Paulo-SP | CEP 04029-200
Tel +55 11 3589-0125

phase@phase.com.br | www.phase.com.br