

Ikegami



8K UHD TV Camera System

SHK-810



BEYOND 4K...

The highest picture quality, functionality and reliability,
with Ikegami's State-of-the-art technology.




8K UHD TV Camera System is now at hand.

Features

- 33 million-pixel Super 35mm CMOS sensor
- Dual-green color arrangement
- Standard SMPTE hybrid fiber/copper camera cable is used
- Built-in back focus adjustment for PL-mount lenses without shims
- 4,000 TV lines horizontal resolution
- System Expander can be used
- 8K Focus Assist function
- Lens Aberration Correction function (requires data from lens)

System Configuration

High quality image without compression : Dual green (40Gbps)

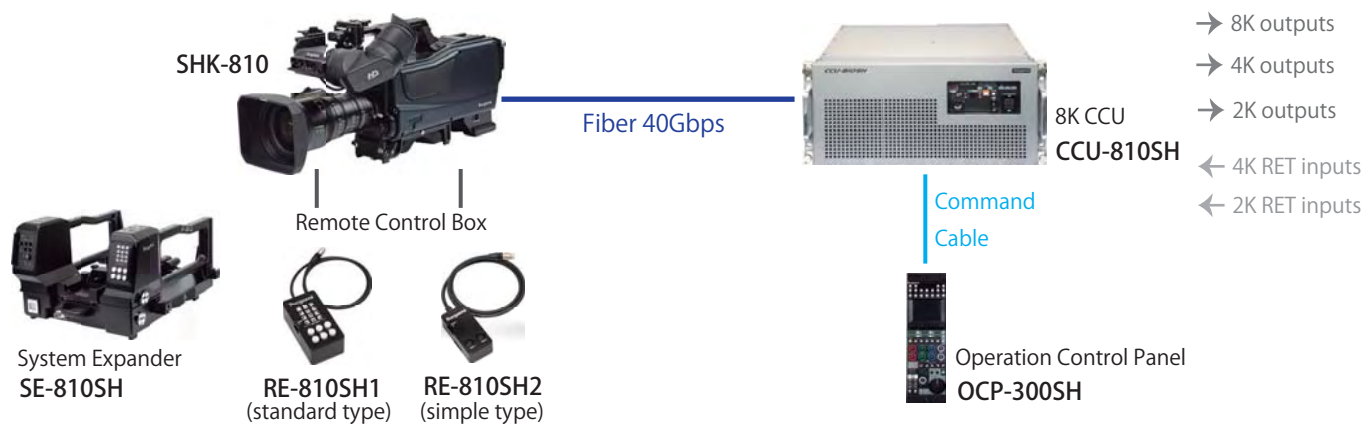

Specifications

Image Sensor	3.3 million-pixel Super 35mm CMOS Sensor	Limiting Resolution	4,000 TV lines horizontal resolution
Sensitivity	F8	Optical System	PL Lens mount
Output Signal	· SHV Dual Green SDI Interface · 4K SMPTE 424M (3G-SDI) Level B · HD SMPTE 292M	Return Signal	· 2-channel x 4K · 4-channel x HD
External Sync. Signal	Tri-Level Sync. or VBS	Extension Distance between Camera Head and CCU	1 km (3,281 ft)
Viewfinder	· 2-inch LCD VF · 7.4-inch OLED VF · 9-inch 4K LCD VF	Operating Voltage	AC100V to 240V (50Hz/60Hz)
Power Consumption	· Camera with 4K viewfinder and CCU: 480VA or less · Camera with 2" viewfinder and CCU: 420VA or less	Operating Temperature	· Camera Head : -10 °C to +45 °C (14°F to 113°F) · CCU : 0 °C to +45 °C (32°F to 113°F) * Storage Temperature : -30 °C to +60 °C (-22°F to 140°F)
Weight	· Camera Head : 8.5kg (18.74lb) · CCU : 29kg (63.93lb)	Operating Humidity	30% to 90% (Non-condensing)
Dimensions	· Camera Head : W168 x H228 x D395.3 mm (W6.61 x H8.98 x D15.56 inch) · CCU : W482 x H222 x D478 mm (W18.98 x H8.74 x D18.82 inch)		

* SHK-810 camera system is designed in collaboration with the Japan Broadcasting Corporation (NHK).

Design and specifications are subject to change without notice.

PHASE Engenharia Ind. e Com. Ltda.

Av. Olegário Maciel 231, Lojas 101 a 105 - Barra da Tijuca, CEP 22 621 200, Rio de Janeiro, RJ. Tel +55.21.2493.0125, Fax +55.21.2493.2595
Av. Ibirapuera 2.907, Conj. B306 & 7 - Ed. Conv. Corp. Plaza – Torre C, Indianópolis, CEP 04029-200, São Paulo-SP – Tel +55 11 3589-0125
phase@phase.com.br - www.phase.com.br

EXCLUSIVE REPRESENTATIVE:





PHASE Engenharia Ind. e Com. Ltda.

Av. Olegário Maciel 231, Lojas 101 a 105
Barra da Tijuca | Rio de Janeiro, RJ | CEP 22 621 200
Tel +55.21.2493.0125

Av. Ibirapuera 2.907, Conj. B306 & 7 - Ed. Conv. Corp. Plaza – Torre C
Indianópolis | São Paulo-SP | CEP 04029-200
Tel +55 11 3589-0125

phase@phase.com.br | www.phase.com.br