



# CueScript™

A WAY WITH WORDS...

Prompters with style  
People with passion



## CSM Prompter Monitors - LED High Brightness HD-SDI

The CueScript range of prompters add style and practicality, resulting in a balance of design for purpose and performance, with ingenuity and quality.

CueScript CSM prompters are incredibly swift to setup with integrated mounting and our CueLock feature. The CSM monitors have a sleek, low profile design that not only looks good, but is robust and durable. Low energy consumption and 3 modes of power start up mean that no fans are required. Presenters will see the difference in CueScript's range of prompters with high resolution LED screens. The built in LED Cue lights have been taken to the next level offering adjustable brightness and 180 degree viewing with a wrap-around design. The benefits of this simple yet hugely effective design will be noticed by all production teams and talent.



### CSM15

#### Technical Specifications

Brightness	1500 nits
Contrast Ratio	700
Viewing Angle	160x140
Back light saver	User selectable timing
Reverse/Rotation	4 way picture orientation

#### Dimensions

Front to Back	11.52" (292mm)
Right to Left	14.16" (360mm)
Depth	2.67" (68mm)
Monitor only weight	8.2lbs/3.7kg
Complete weight with Large Hood, Glass & Mount Purple	22.4lbs/10.2kg

#### Video

Autosensing	PAL/NTSC/VGA/ HDMI/HD/HD-SDI Composite 75 Ohms Looping video output HD-SDI - Input HD-SDI - Output Illuminated LED push-buttons with adjustable brightness
Controls	LTC/VITC timecode via the video input
Timecode	

#### Power Inputs & Connectors

Internal PSU	IEC Wide Range 100-264 AC & 150VDC XLR 4pin 12v DC 36 Watts
--------------	--

#### Power Consumption

3 Mode adjustable power input
Low - 17 Watts
Medium - 19 Watts
High - 24 Watts

#### Additional Connectors

Tally DC Out	USB 5V
Tally Sensor	Mini USB Tally Sensor
	5-12 Volt Tally input
USB - DC Out	Mini USB 5V & Tally repeat
4 Pin XLR DC Out	12V 36 Watts

#### Certifications

CE, TUV, FCC, C-Tick, PSE, RoHs

#### Mounting

Integrated "On Air" Monitor mounting rails.  
CueLock mounting system built in.



## CSM17

### Technical Specifications

Brightness	1700 nits
Contrast Ratio	1000
Viewing Angle	170x160
Back light saver	User selectable timing
Reverse/Rotation	4 way picture orientation

### Dimensions

Front to Back	13.5" (344mm)
Right to Left	15.57" (395mm)
Depth	2.67" (68mm)
Monitor only weight	11.4lbs/5.2kg
Complete weight with Large Hood, Glass & Mount Purple	25.6lbs/11.6kg

### Video

Autosensing	PAL/NTSC/VGA/ HDMI/HD/HD-SDI Composite 75 Ohms Looping video output HD-SDI - Input HD-SDI - Output Illuminated LED
Controls	push-buttons with adjustable brightness
Timecode	LTC/VITC timecode via the video input

### Power Inputs & Connectors

Internal PSU	IEC Wide Range 100-264 AC & 150VDC XLR 4pin 12v DC 36 Watts
--------------	--

### Power Consumption

3 Mode adjustable power input
Low - 27 Watts
Medium - 31 Watts
High - 39 Watts

### Additional Connectors

Tally DC Out	USB 5V
Tally Sensor	Mini USB Tally Sensor
	5-12 Volt Tally input
USB - DC Out	Mini USB 5V
	& Tally repeat
4 Pin XLR DC Out	12V 36 Watts

### Certifications

CE, TUV, FCC, C-Tick, PSE, RoHs

### Mounting

Integrated "On Air" Monitor mounting rails.  
CueLock mounting system built in.

## CSM19

### Technical Specifications

Brightness	1500 nits
Contrast Ratio	1000
Viewing Angle	170x160
Back light saver	User selectable timing
Reverse/Rotation	4 way picture orientation

### Dimensions

Front to Back	14.51" (368mm)
Right to Left	16.92" (430mm)
Depth	2.67" (68mm)
Monitor only weight	11.2lbs/5.1kg
Complete weight with Large Hood, Glass & Mount Purple	25.4lbs/11.5kg

### Video

Autosensing	PAL/NTSC/VGA/ HDMI/HD/HD-SDI Composite 75 Ohms Looping video output HD-SDI - Input HD-SDI - Output Illuminated LED
Controls	push-buttons with adjustable brightness
Timecode	LTC/VITC timecode via the video input

### Power Inputs & Connectors

Internal PSU	IEC Wide Range 100-264 AC & 150VDC XLR 4pin 12v DC 36 Watts
--------------	--

### Power Consumption

3 Mode adjustable power input
Low - 32 Watts
Medium - 36 Watts
High - 45 Watts

### Additional Connectors

Tally DC Out	USB 5V
Tally Sensor	Mini USB Tally Sensor
	5-12 Volt Tally input
USB - DC Out	Mini USB 5V
	& Tally repeat
4 Pin XLR DC Out	12V 36 Watts

### Certifications

CE, TUV, FCC, C-Tick, PSE, RoHs

### Mounting

Integrated "On Air" Monitor mounting rails.  
CueLock mounting system built in.

\*All specifications are subject to change



# EMC Prompter Monitors

With the same CueScript principles of style, quality and ease of setup comes the EMC range of monitors.

The EMC's are a simplified version of our high end CSM monitor range. With excellent image and scroll quality, the EMC monitor is the only middle market prompter with the level of features and quality needed for a mission critical product.



## EMC15

15" EMC Prompter Monitor, suitable for educational, middle markets & corporate

### Technical Specifications

Brightness	400 nits
Contrast Ratio	700
Viewing Angle	160x140
Native Screen Resolution	XGA 1024x768
Reverse/Rotation	4 way picture orientation

### Dimensions

Front to Back	11.86" (301mm)
Right to Left	14.24" (362mm)
Depth	1.8" (46mm)
Monitor only weight	5.2 lbs / 2.4kg
Complete weight with Large Hood, Glass & Mount Purple	18.2 lbs / 8.3kg

### Video

Autosensing	PAL/NTSC/VGA Composite 75 Ohms
Controls	Illuminated LED push-buttons with adjustable brightness

### Power Consumption

DC Power Input	1.3 A / 15.6 Watts
DC Power Connector	2.5mm x 5.5mm Center Positive

### Additional Connectors

USB – DC Out	USB-A 5V
--------------	----------

### Certifications

CE, TUV, FCC, C-Tick, PSE, RoHS

### Mounting

CueLock mounting system built in.



# EMC17

17" EMC Prompter Monitor,  
suitable for educational, middle  
markets & corporate

**Technical Specifications**

Brightness	350 nits
Contrast Ratio	800
Viewing Angle	160x140
Native Screen Resolution	SXGA 1280x1024
Reverse/Rotation	4 way picture orientation

**Dimensions**

Front to Back	13.82" (351mm)
Right to Left	15.5" (394mm)
Depth	1.8" (46mm)
Monitor only weight	6.8 lbs / 3.1kg
Complete weight with Large Hood, Glass & Mount Purple	19.8 lbs / 9kg

**Video**

Autosensing	PAL/NTSC/VGA Composite 75 Ohms
Controls	Illuminated LED push-buttons with adjustable brightness

**Power Consumption**

DC power input	1.9 A / 22.8 Watts
DC Power Connector	2.5mm x 5.5mm Center Positive

**Additional Connectors**

USB – DC Out	USB-A 5V
--------------	----------

**Certifications**

CE, TUV, FCC, C-Tick, PSE, RoHs

**Mounting**

CueLock mounting system built in.

## CueScript Collapsible Hoods

The CueScript Collapsible Hoods are perfect for portable use.

The Collapsible Hoods are super simple to rig and can easily be transported with the glass in place. Available in small, medium and large sizes.

- **CSHCS - Small Collapsible Hood**  
Perfect for jibs/cranes and small, lightweight setups. Use with CueScript Small Glass.
- **CSHCM - Medium Collapsible Hood**  
Lightweight and portable full size prompter hood. Use with CueScript Medium Glass.
- **CSHCL - Large Collapsible Hood**  
Portable large prompter hood for wide angle and box lenses. Use with CueScript Large Glass.



\*All specifications are subject to change


# Mounting

## CSMPL – CueScript Mount Purple

The CueScript Mount Purple has been designed with ease of use in mind, allowing seamless setup and balance without the use of tools.

A quick release camera plate forming is machined into the Mount Purple so no more fiddly screws! If required a matching riser plate can be attached to the Mount Purple.

- CueLock feature.
- Fully adjustable for all fluid heads.
- Compatible with Collapsible, Medium and Large Hoods, which are easily interchangeable.

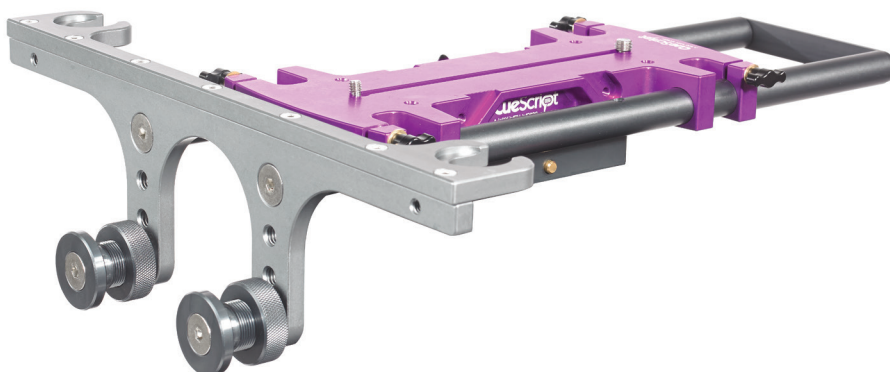


**Mount Purple Riser Plates** – 3 options of camera riser plate heights for CSMPL  
Small (3") - CSMPRS,  
Medium (4") - CSMPRM,  
Large (6") - CSMPL



**Telescopic Mounting Rods** – 7"- CSTRM & 12"- CSTRL T-Rods for use with large studio heads



**CSRAMT –  
Stand Mount**  
*For mounting a CSM  
prompter onto a stand*

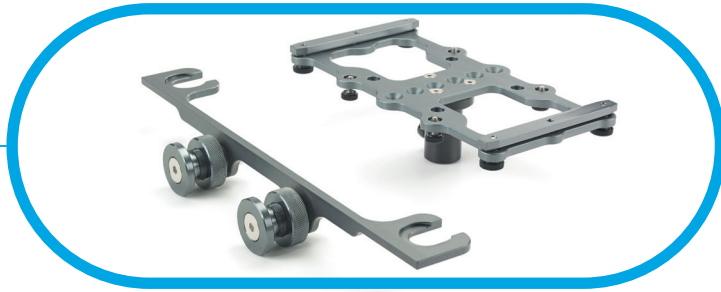

### **CSMPM – CueScript EMC Mount Purple**

For use with the EMC range of monitors, the Mount Purple Medium (CSMPM) is a smaller mounting plate more suitable for lightweight setup

Beautifully machined to allow for slide and click mounting and fully adjustable for all fluid heads. A fixed height riser plate is attached as standard.

- Slide and click mounting and fully adjustable for all fluid heads.
- Compatible with EMC monitors only.
- Compatible with the Medium Hood and Medium or Large Collapsible Hoods, which are easily interchangeable.



# Talent Monitors

## CSTM19 – CueScript 19” ‘On-Air’ Talent Monitor

In recent years the introduction of talent monitors hung under the prompter has become increasingly popular, tidying up the studio floor and preventing the talent having to look off camera.

CueScript Talent Monitors have been built for purpose and have an aesthetically pleasing curved design. Integrated mounting rails allow for smooth, quick setup and power to the Talent Monitors can be taken from all the CSM prompters.



## CSTM19

### Technical Specifications

Brightness	1500 nits
Reverse/Rotation	2 way picture orientation

### Dimensions

Height	12.25" (311mm)
Width	18.25" (464mm)
Depth	1.75" (44mm)
Weight	8.5lbs/3.8kg

### Video

Autosensing	PAL/NTSC/VGA/ HD-HD-SDI Composite 75 Ohms Looping video output
Input	HD-SDI/S-Video VGA/DVI
Output	HD-SDI
Controls	Illuminated LED push-buttons with adjustable brightness

### Power Inputs & Connectors

Internal PSU	XLR 4pin 12v DC 36 Watts
--------------	-----------------------------


### Certifications

CE, TUV, FCC, C-Tick, PSE, RoHs

### Mounting

Integrates to the CueScript CSM monitor range via the CSTMM mount.

\*All specifications are subject to change

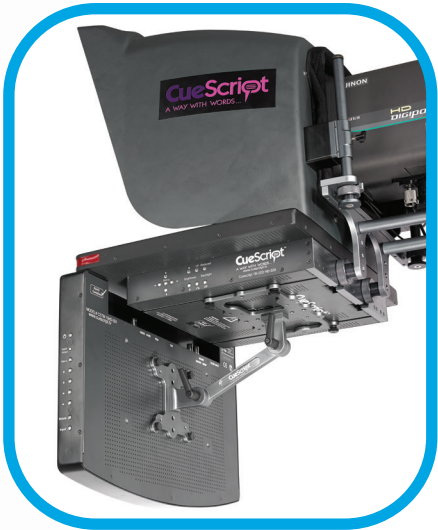



# CSTM24

**Technical Specifications**

Brightness	1000 nits
Reverse/Rotation	2 way picture orientation

**Dimensions**

Height	14.875" (378mm)
Width	23.25" (590mm)
Depth	2" (51mm)
Weight	10 lbs/ 4.53 kg

**Video**

Autosensing	PAL/NTSC/VGA/ HD-HD-SDI Composite 75 Ohms Looping video output
Input	HD-SDI/S-Video VGA/DVI
Output	HD-SDI
Controls	Controls Illuminated LED push-buttons with adjustable brightness

**Power Inputs & Connectors**

AC Mains with internal Power Supply

**Certifications**

CE, TUV, FCC, C-Tick, PSE, RoHS

**Mounting**

Integrates to the CueScript CSM monitor range via the CSTMML mount.

**CSTM24 –  
CueScript 24”  
‘On-Air’ Talent Monitor**





\*All specifications are subject to change



## Talent Monitor Mounts

These fully adjustable and lightweight mount slides into the in-built rails of the CSM monitors with ease, providing a strong and secure fixing for the CueScript Talent Monitors.

### **CSTMM** – CueScript 19" Talent Monitor Mount

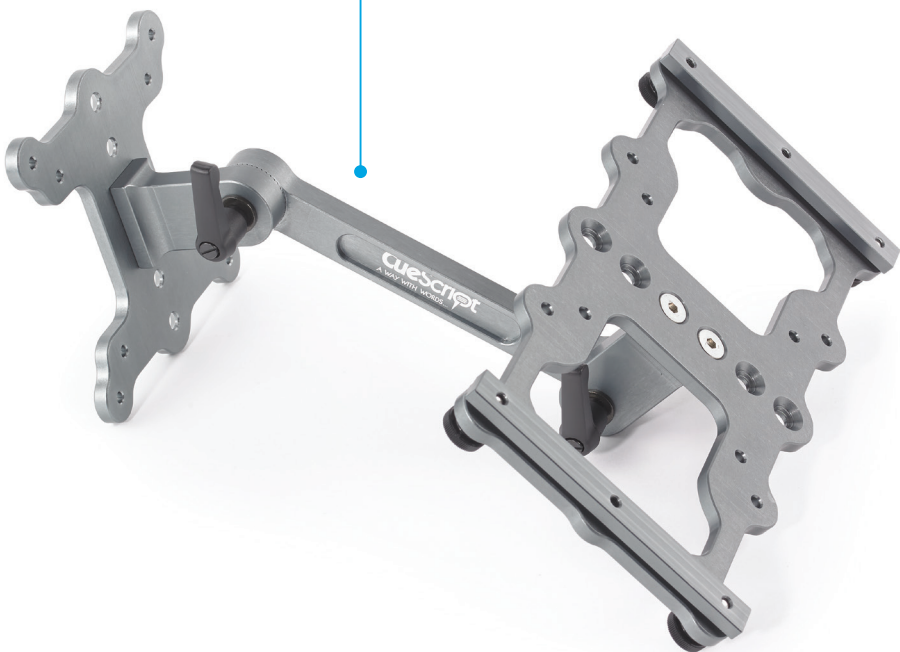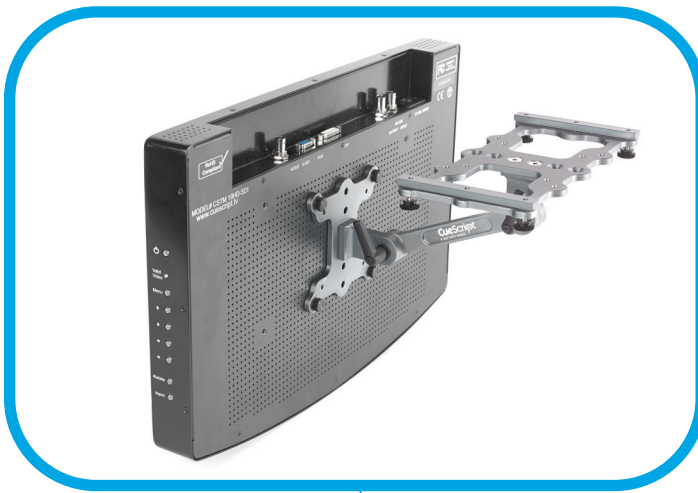

### Features include:

- Standard VESA mount incorporated.
- Robust yet lightweight.
- 3 Axis movement for complete adjustability.

### CSTMML – CueScript 24” Talent Monitor Mount

